



ABS FILAMENT



Smoothly Printing



Tolerance: $\pm 0.03\text{mm}$



Anti-Wrapping



No-Bubble



Low odor



Low Shrinkage



High Resistant



Neat Spool

ABS Printing Recommend Temperature

240°C
~
270°C

Print Temp

80°C
~
120°C

Heated Bed Temp
(Necessary Condition)



Bright Your Imagination

Suitable for printing small accessories part



Two Year Warranty



Net Weight: 1KG



Vacuum Packing



Packing Box



Basic Parameters

Brand	CoLiDo
Name	CoLiDo Universal 3D Printing Filament
Filament	ABS
Diameter of the line	1.75mm
Elongation at break(%)	25%
Tolerance	±0.03mm
Print temp	240-270°C
Platform temp	80-120°C
Tensile force (KGF)	6-11
Melt flow rate(g/10min)	12-19g/10min(220°C, 10kg)
Heat deflection temp(°C)	75°C
Density(g/cm ³)	1.04
Water absorption	1.1%
Print speed	50-100m/s
Bubbles	100% Zero bubbles
Net Weight	1KG/volume
Gross weight	1.3KG/volume
Length	1.75mm(1KG)=395m




✓ Tangle Free

✓ High Precision

Work for 99% FDM 3D Printer & 3D Pen



Why Choose CoLiDo Filament?

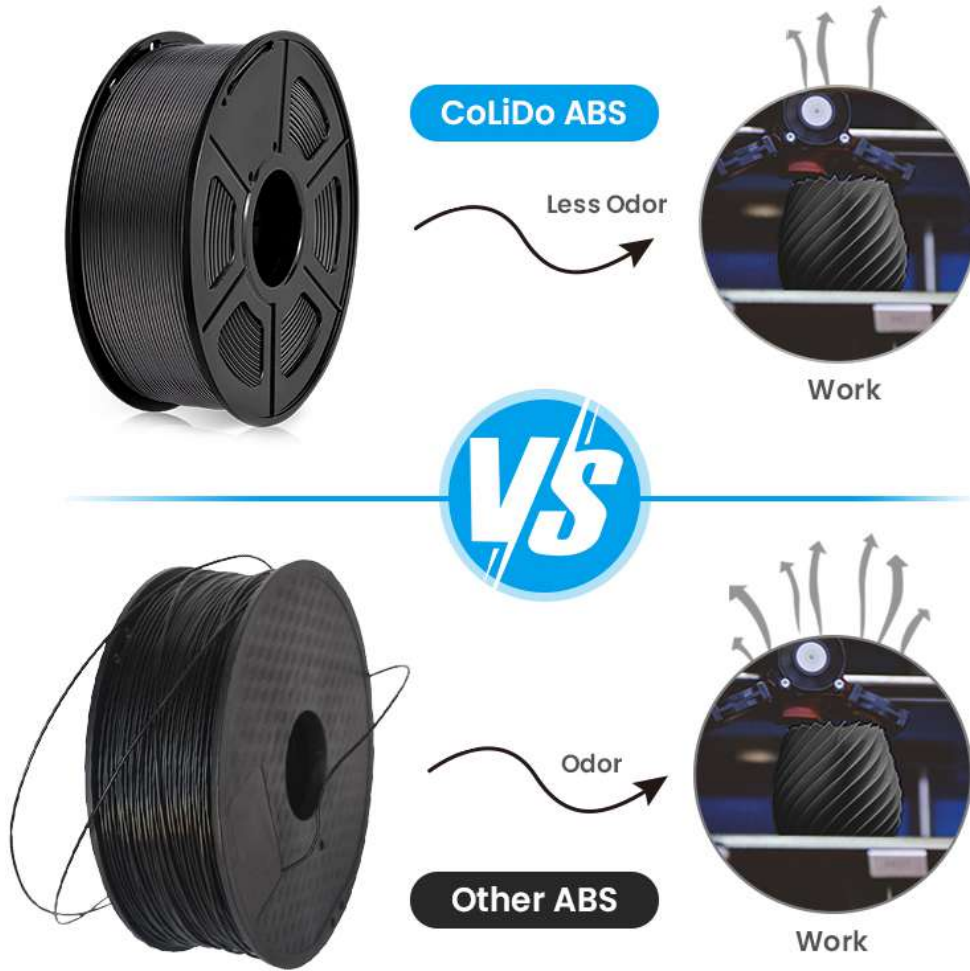

Tough




Strong



Durable



Highly Resistant

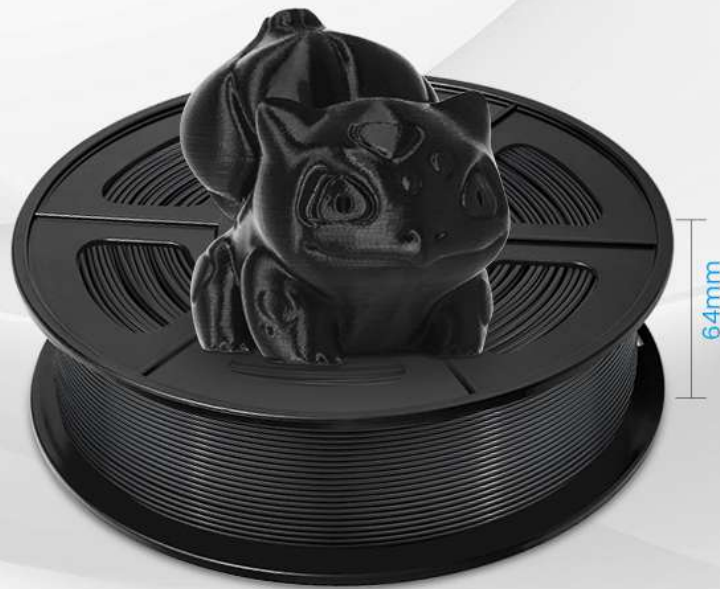

200mm

64mm