

PETG FILAMENT



Smoothly Printing



Tolerance: $\pm 0.03\text{mm}$



Anti-Wrapping



No-Bubble



Not-Toxic



Low Shrinkage



High Toughness



Tangle Free

Why Choose CoLiDo Filament?



VS



✔ *Save Time*

✔ *Save Money*

✔ *Save Filament*



1 **High Toughness**

2 **High Transparent**

3 **Eco-Friendly Material**





✓ *Tangle Free*

✓ *High Precision*

Work For 99% FDM 3D Printer



PETG Temperature Parameter

220°C
~
250°C

Print Temp

75°C
~
85°C

Heated Bed Temp




Bright Your Imagination

Suitable for printing crafts, artwork, industrial design samples, advertising fonts



Two Year Warranty

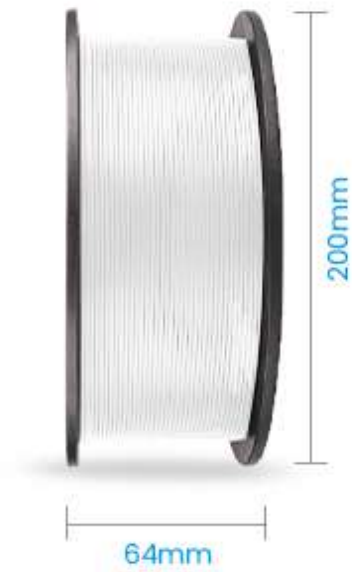

Net Weight: 1KG



Vacuum Packing



Packing Box



Basic Parameters

Brand	CoLiDo
Name	CoLiDo Universal 3D Printing Filament
Filament	PETG
Diameter of the line	1.75mm
Elongation at break(%)	210%
Tolerance	±0.03mm
Print temp	220-250°C
Platform temp	75-85°C
Tensile force (KGF)	8-12
Melt flow rate(g/10min)	6-11g/10min(220°C, 2.16kg)
Melting point	180-190°C
Heat deflection temp(°C)	66
Density(g/cm ³)	1.25±0.05
Water absorption	0.8%
Print speed	50-100m/s
Bubbles	100% Zero bubbles
Net Weight	1KG/volume
Gross weight	1.3KG/volume
Length	1.75mm(1KG)=320m